



we treasure Your Smile😊

YS Tech Desktop CPU Cooler Product Spec

單 位 模組事業處

日 期 2025/05/15

表單編號:YS-C2-002_02 V1


Intel 55W Solution

- Aluminum Insert Copper Core

Optional back plate



Photo

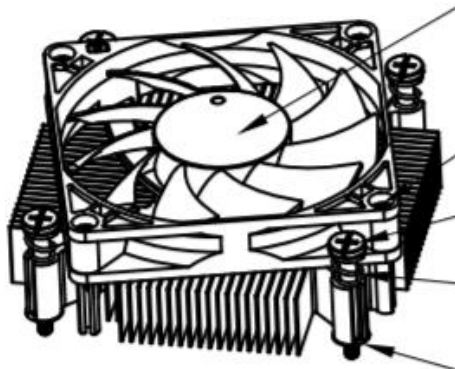

YS P/N: T-98TM050-02

SPECIFICATION



Application	Intel
Socket Type	LGA 115X / 1200
TDP	55W
Overall Dimensions	96.2(L) *96.2(W) *35.5(H) mm
Major Integrated Part	Aluminum Insert Copper Core
Weight	N/A g
T.I.M.	Shin Etsu X23-7783D
Installation Kit	Screws/Springs
Fan Dimension	80(L) *80(W) *15.3(H) mm
Fan Bearing Type	2 Ball
Fan Speed	4500 rpm
Fan Life Expectancy	40°C / 50,000 hrs
Fan Connector	4 Pin PWM


Intel 65W Solution

- Aluminum Extrusion Solution

Optional back plate



Photo

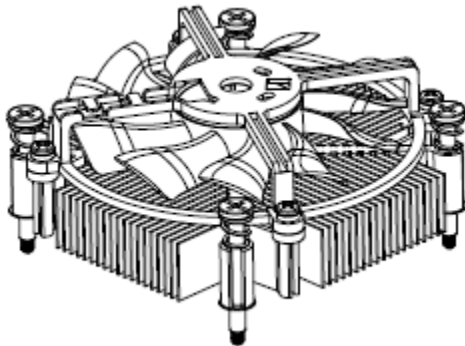

YS P/N: T-98TM050-03

SPECIFICATION



Application	Intel
Socket Type	LGA 115X / 1200
TDP	65W
Overall Dimensions	95(L) *95(W) *38.3(H) mm
Major Integrated Part	Aluminum Extrusion
Weight	N/A g
T.I.M.	Shin Etsu X23-7783D
Installation Kit	Screws/Springs
Fan Dimension	80(L) *80(W) *15.3(H) mm
Fan Bearing Type	2 Ball
Fan Speed	4500 rpm
Fan Life Expectancy	40°C / 50,000 hrs
Fan Connector	4 Pin PWM

Intel 35W Solution

- Aluminum Extrusion Solution


Optional back plate



SPECIFICATION



Photo

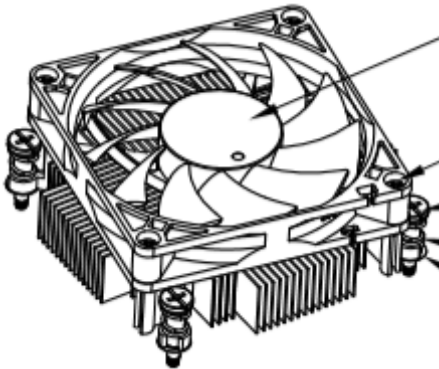

YS P/N: T-98TM159-01

Application	Intel
Socket Type	LGA 115X / 1200
TDP	35W
Overall Dimensions	92(L) *92(W) *35.3(H) mm
Major Integrated Part	Aluminum Extrusion
Weight	N/A g
T.I.M.	Shin Etsu X-23-7783D
Installation Kit	Screws/Springs
Fan Dimension	80(L) *80(W) *15.3(H) mm
Fan Bearing Type	2 Ball
Fan Speed	4500 rpm
Fan Life Expectancy	40°C / 50,000 hrs
Fan Connector	4 Pin PWM

Intel 65W Solution

- Aluminum Insert Copper Core

Optional back plate



Photo



YS P/N: T-98TI303-01

SPECIFICATION



Application	Intel
Socket Type	LGA 115X / 1200
TDP	65W
Overall Dimensions	87(L) *87(W) *22.5(H) mm
Major Integrated Part	Aluminum Insert Copper Core
Weight	N/A g
T.I.M.	Shin Etsu X-23-7762
Installation Kit	Screws/Springs
Fan Dimension	80(L) *80(W) *10(H) mm
Fan Bearing Type	Sleeve
Fan Speed	4200 rpm
Fan Life Expectancy	40°C / 50,000 hrs
Fan Connector	4 Pin PWM

Intel 65W Solution

- Aluminum Extrusion Solution

Optional back plate



SPECIFICATION



Photo



YS P/NT-98TI336-01

Application	Intel
Socket Type	LGA 1700
TDP	65W
Overall Dimensions	95(L) *95(W) *38.3(H) mm
Major Integrated Part	Aluminum Extrusion
Weight	N/A g
T.I.M.	Shin Etsu X-23-7762
Installation Kit	Screws/Springs
Fan Dimension	92(L) *92(W) *15(H) mm
Fan Bearing Type	2B
Fan Speed	3600 rpm
Fan Life Expectancy	40°C / 50,000 hrs
Fan Connector	4 Pin PWM


Intel 65W Solution

- Aluminum Insert Copper Core

Optional back plate



Photo

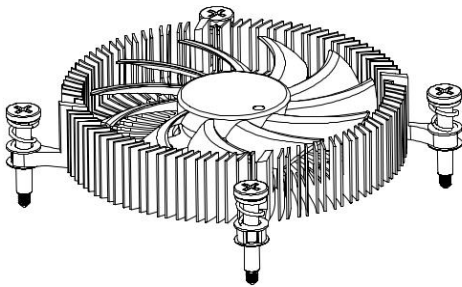

YS P/N: T-98TI349-01

SPECIFICATION



Application	Intel
Socket Type	LGA 1700
TDP	65W
Overall Dimensions	Ø90*22.7(H) mm
Major Integrated Part	Aluminum Insert Copper Core
Weight	N/A g
T.I.M.	Shin Etsu X-23-7921-5
Installation Kit	Screws/Springs
Fan Dimension	80(L) *80(W) *10(H) mm
Fan Bearing Type	2 Ball
Fan Speed	4200 rpm
Fan Life Expectancy	40°C / 50,000 hrs
Fan Connector	4 Pin PWM

Intel 125W Solution

- Heat Pipe Module Solution

Optional back plate



Photo



YS P/N: T-98TM161-07

SPECIFICATION



Application	Intel Desk Top
Socket Type	LGA 1700
TDP	125W
Overall Dimensions	98(L) *87.97(W) *126(H) mm
Major Integrated Part	Heat Pipe Module
Weight	N/A g
T.I.M.	Shin Etsu X-23-7762
Installation Kit	Screws/Springs
Fan Dimension	92(L) *92(W) *25.4(H) mm
Fan Bearing Type	2 Ball
Fan Speed	3800 rpm
Fan Life Expectancy	40°C / 65,000 hrs
Fan Connector	4 Pin PWM

Intel 125W Solution

- Heat Pipe Module Solution

Optional back plate



Photo



YS P/N: T-98TM161-09

SPECIFICATION



Application	Intel Desk Top
Socket Type	LGA 1700
TDP	125W
Overall Dimensions	98(L) *87.97(W) *126(H) mm
Major Integrated Part	Heat Pipe Module
Weight	N/A g
T.I.M.	Shin Etsu X-23-7762
Installation Kit	Screws/Springs
Fan Dimension	92(L) *92(W) *25.4(H) mm
Fan Bearing Type	2 Ball
Fan Speed	3800 rpm
Fan Life Expectancy	40°C / 65,000 hrs
Fan Connector	4 Pin PWM

AMD AM4 105W Solution

- Heat Pipe Module Solution

Optional back plate



Photo



YS P/N: T-98TM161-03

SPECIFICATION



Application	AMD Desk Top
Socket Type	AM4
TDP	105W
Overall Dimensions	115.4(L) *74.6(W) *126(H) mm
Major Integrated Part	Heat Pipe Module
Weight	N/A g
T.I.M.	Shin Etsu X-23-7762
Installation Kit	CLIP
Fan Dimension	92(L) *92(W) *25.4(H) mm
Fan Bearing Type	2 Ball
Fan Speed	3800 rpm
Fan Life Expectancy	40°C / 65,000 hrs
Fan Connector	4 Pin PWM

AMD AM4 105W Solution

- Heat Pipe Module Solution

Optional back plate



Photo



YS P/N: T-98TM161-10

SPECIFICATION



Application	AMD Desk Top
Socket Type	AM4
TDP	105W
Overall Dimensions	115.4(L) *74.6(W) *126(H) mm
Major Integrated Part	Heat Pipe Module
Weight	N/A g
T.I.M.	Shin Etsu X-23-7762
Installation Kit	CLIP
Fan Dimension	92(L) *92(W) *25.4(H) mm
Fan Bearing Type	2 Ball
Fan Speed	3800 rpm
Fan Life Expectancy	40°C / 65,000 hrs
Fan Connector	4 Pin PWM

Intel 150W Solution

- Heat Pipe Module Solution


Optional back plate



SPECIFICATION



Photo

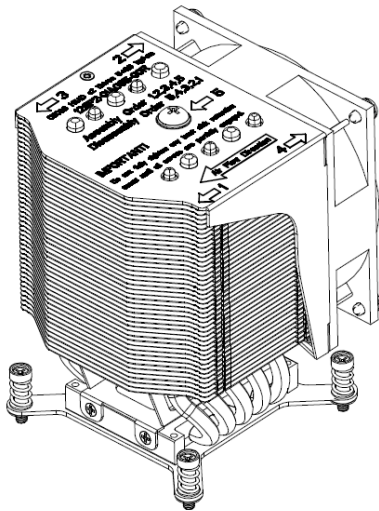

YS P/N: T-98TN068-01

Application	Intel
Socket Type	LGA 2011 / 2066
TDP	150W
Overall Dimensions	92.5(L) *105.02(W) *125.8(H) mm
Major Integrated Part	Heat Pipe Module
Weight	N/A g
T.I.M.	Shin Etsu X-23-7868-2D
Installation Kit	Screws/Springs
Fan Dimension	92(L) *92(W) *25.4(H) mm
Fan Bearing Type	2 Ball
Fan Speed	5000 rpm
Fan Life Expectancy	40°C / 70,000 hrs
Fan Connector	4 Pin PWM


AMD 65W Solution

- Heat Pipe Module Solution

Optional back plate



Photo

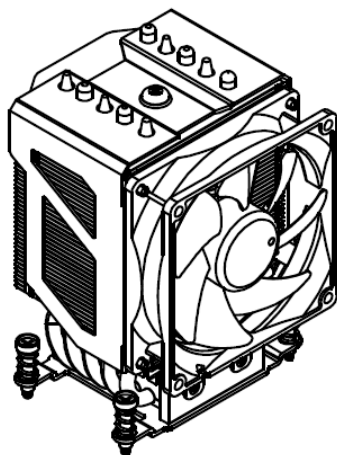

YS P/N: T-98TN265-01

SPECIFICATION



Application	AMD
Socket Type	AM4
TDP	65W
Overall Dimensions	92.5(L) *105.02(W) *136.97(H) mm
Major Integrated Part	Heat Pipe Module
Weight	N/A g
T.I.M.	Shin Etsu X-23-7762-2D
Installation Kit	Screws/Springs
Fan Dimension	92(L) *92(W) *25.4(H) mm
Fan Bearing Type	2 Ball
Fan Speed	4500 rpm
Fan Life Expectancy	40°C / 70,000 hrs
Fan Connector	4 Pin PWM

Intel 65W Solution

- Aluminum Extrusion Solution

Optional back plate



Photo



YS P/N: T-98TM324-02

SPECIFICATION



Application	Intel
Socket Type	LGA 1700
TDP	65W
Overall Dimensions	113.6(L) *87(W) *61.7(H) mm
Major Integrated Part	Aluminum Extrusion
Weight	N/A g
T.I.M.	Shin Etsu X-23-7762
Installation Kit	Screws/Springs
Fan Dimension	80(L) *80(W) *25.4(H) mm
Fan Bearing Type	Sleeve
Fan Speed	5200 rpm
Fan Life Expectancy	40°C / 50,000 hrs
Fan Connector	4 Pin PWM

Intel 65W Solution

- Aluminum Extrusion Solution

Photo



YS P/N: T-98TM325-02

SPECIFICATION



Application	Intel
Socket Type	LGA 1700
TDP	65W
Overall Dimensions	113.6(L) *94.6(W) *61.7(H) mm
Major Integrated Part	Aluminum Extrusion
Weight	N/A g
T.I.M.	Shin Etsu X-23-7762
Installation Kit	PUSH PIN
Fan Dimension	80(L) *80(W) *25.4(H) mm
Fan Bearing Type	Sleeve
Fan Speed	5200 rpm
Fan Life Expectancy	40°C / 50,000 hrs
Fan Connector	4 Pin PWM

YEN SUN TECHNOLOGY CORPORATION

THANK YOU FOR LISTENING.

www.ystech.com.tw

